

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number
WO 2005/041616 A1

(51) International Patent Classification⁷: **H04R 17/00**,
7/04, H01L 41/09

(74) Agents: **MERRYWEATHER, Colin, Henry et al.**; J.A.
Kemp & Co., 14 South Square, Gray's Inn, London WC1R
5JJ (GB).

(21) International Application Number:
PCT/GB2004/004314

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(22) International Filing Date: 11 October 2004 (11.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0324051.2 14 October 2003 (14.10.2003) GB

(71) Applicant (*for all designated States except US*): **1...
LIMITED** [GB/GB]; St John's Innovation Centre, Cowley
Road, Cambridge CB4 0WS (GB).


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **TOPLISS, Richard**
[GB/GB]; 43 Bishops Road, Trumpington, Cambridge CB2
2NQ (GB).

[Continued on next page]

(54) Title: LOUDSPEAKER

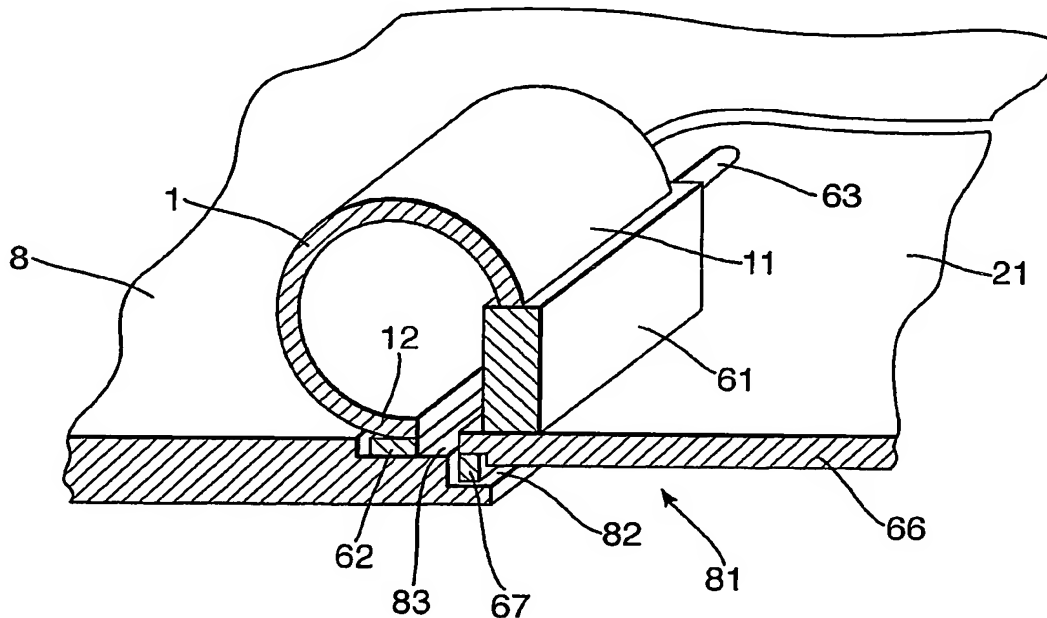

(57) Abstract: A loudspeaker comprises a support (8) which may be a portion of the housing of an electronic device and a diaphragm (21) mounted on the support (8). A piezoelectric actuator (1) arranged to bend on activation providing relative movement between two ends of the actuator (1) is coupled at each of its ends (11) and (12) to the diaphragm (21) to vibrate the diaphragm (21) on activation and generate sound. One end of the actuator (1) coupled to a portion (62) of the diaphragm (21) at the edge of the diaphragm (21) is fixed relative to the support (8).

WO 2005/041616 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.